

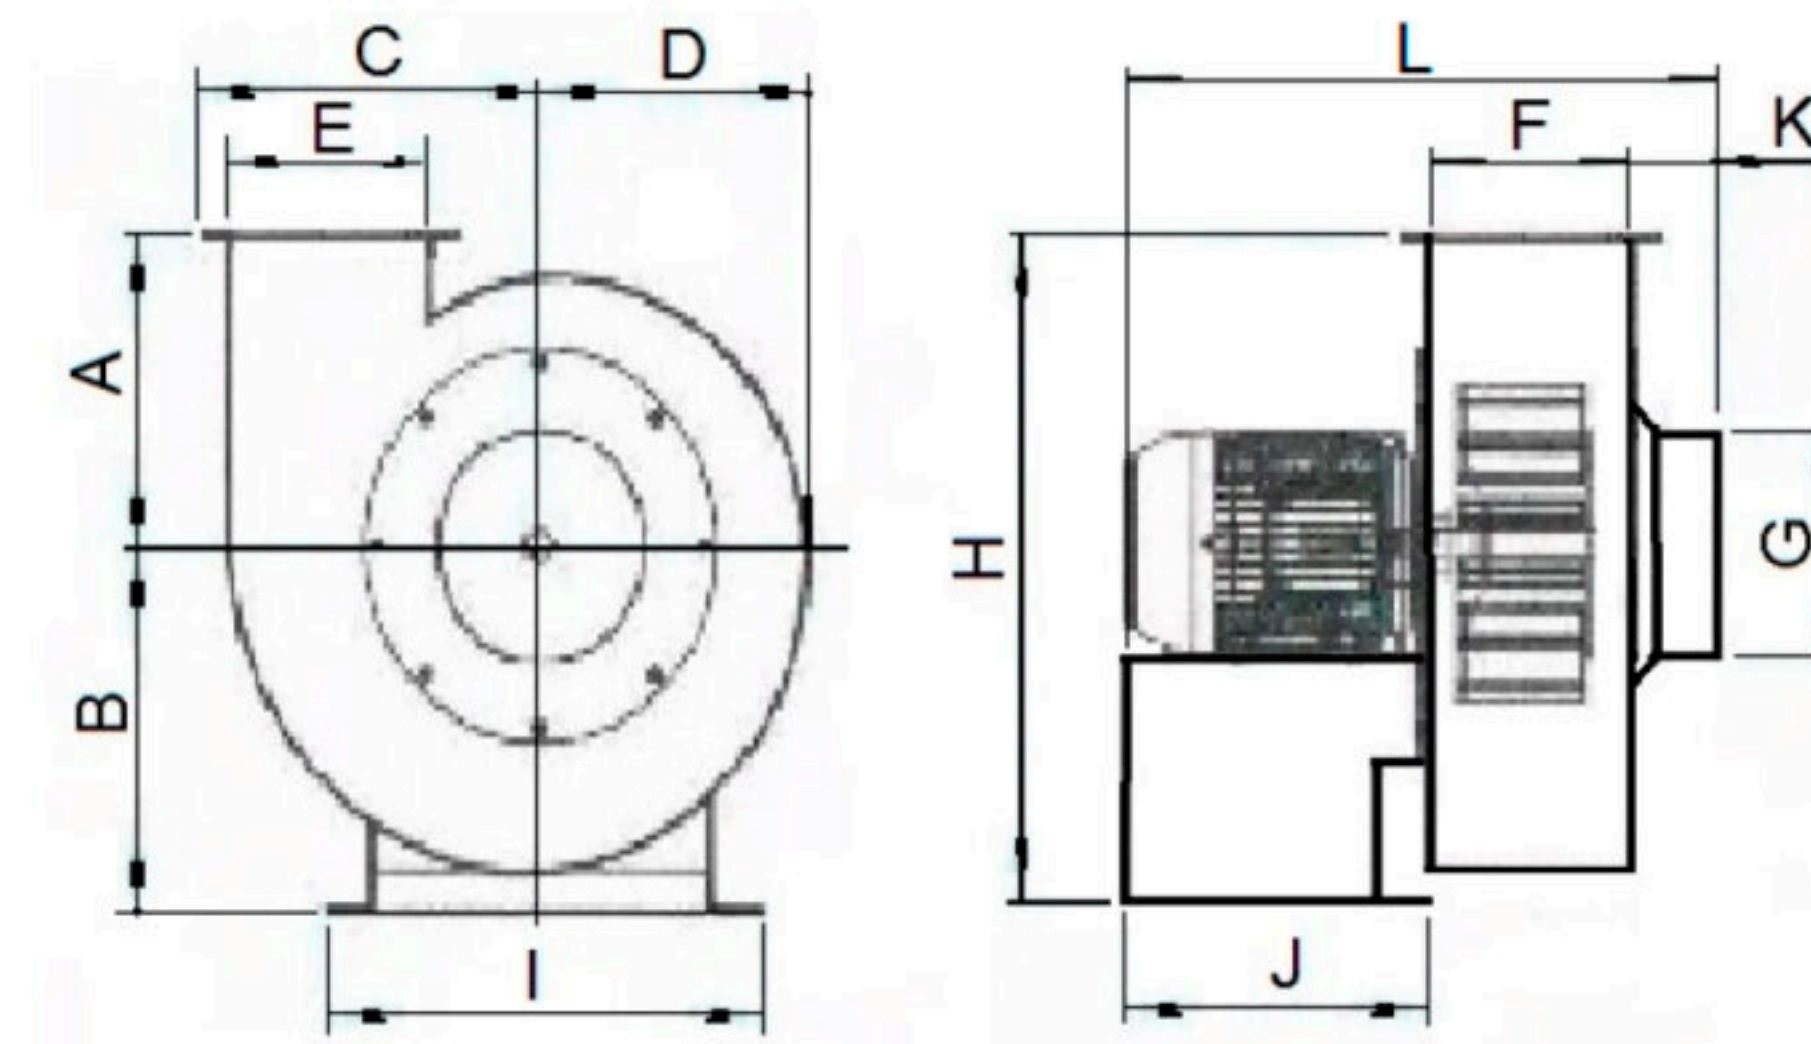
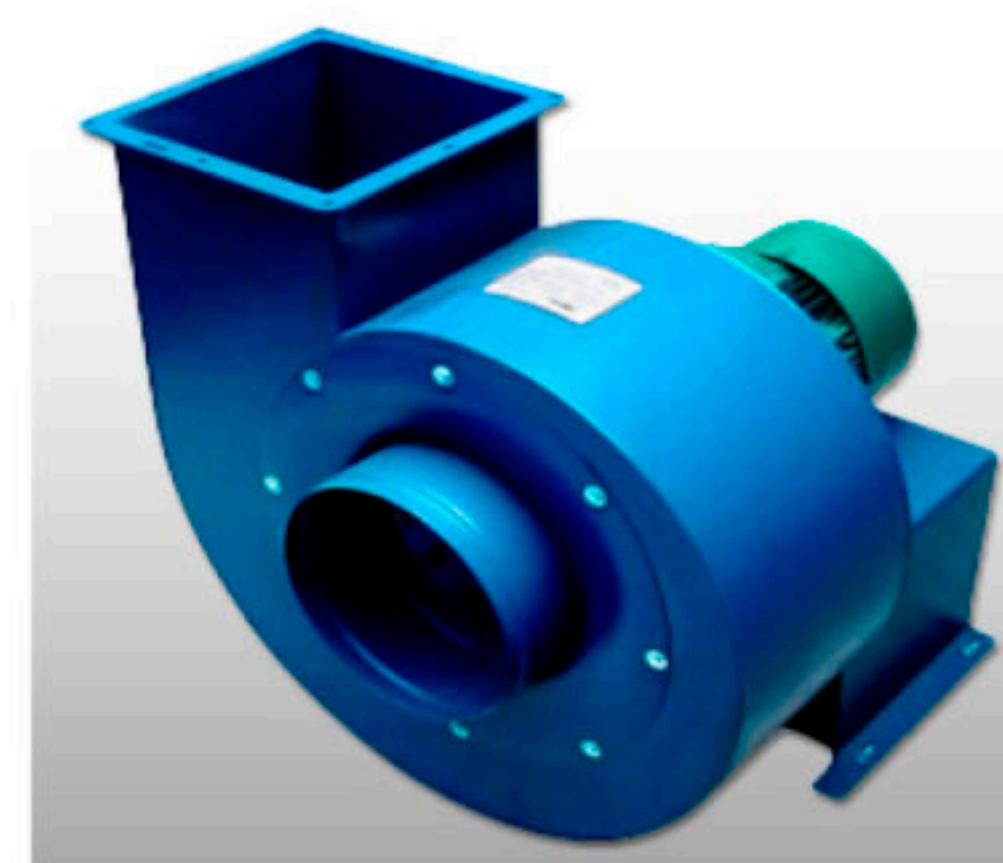


TABELA DE MEDIDAS – EX. CENTRÍFUGOS

Rev. 04 – Nov/2018

MODELO	ROTOR TIPO	Ø ROTOR	POTÊNCIA (CV ou HP)	ROTAÇÃO (RPM)	VAZÃO (m3/min)	PRESSÃO (mmCA)	RUIDO (dba)	PESO (Kg)	A	B	C	D	E	F	G	H	I	J	K	L
JÚPITER	RAD	190	½	3500	19,6	75	80	15	182	118	123	122	Ø100	Ø100	Ø150	300	166	220	80	410
JÚPITER	SIR	167	½	3500	20,5	82	75	15	182	118	123	122	Ø100	Ø100	Ø150	300	166	220	80	410
EAC 1/2 MN	SIR	190	½	1750	18	30	63	35	172	226	189	139	160	140	Ø150	398	310	200	80	420
EAC 1/2 MAR	RAD	190	½	3500	20	90	88	30	150	226	211	151	120	110	Ø150	376	310	200	80	390
EAC 1/2 TN	SIR	190	½	1750	18	30	63	35	172	208	189	139	160	140	Ø150	380	310	200	80	420
EAC 1/2 TAR	RAD	190	½	3500	20	90	88	30	150	200	211	151	120	110	Ø150	350	310	185	80	390
EAC 1 MN	SIR	230	½ – 1	1750	22 / 24	38 / 40	63 / 64	37	220	269	271	211	160	160	Ø160	489	352	220	102	482
EAC 1 MAR	RAD	230	1	3500	24	120	89	30	166	269	238	168	130	100	Ø160	435	352	220	102	422
EAC 1 TN-0,5	SIR	230	½	1750	22	38	63	35	220	251	271	211	160	160	Ø160	471	352	220	102	482
EAC 1 TN	SIR	230	1	1750	24	40	64	38	220	260	271	211	160	160	Ø160	480	352	230	102	482
EAC 1 TAR	RAD	230	1	3500	24	120	89	30	166	251	238	168	130	100	Ø160	417	352	220	102	422
EAC 2 MN	SIR	260	1 – 2	1750	28 / 30	45 / 48	66 / 68	46	228	309	299	229	180	180	Ø180	537	386	240	125	545
EAC 2 MAR	RAD	260	2	3500	35	160	92	38	200	309	285	214	130	110	Ø180	509	386	240	125	475
EAC 2 TN-1	SIR	260	1	1750	28	45	66	43	228	300	299	229	180	180	Ø180	528	386	240	125	545
EAC 2 TN	SIR	260	2	1750	30	48	68	47	228	310	299	229	180	180	Ø180	537	386	240	125	545
EAC 2 TAR	RAD	260	2	3500	35	160	92	38	200	300	285	214	130	110	Ø180	500	386	240	125	475
EAC 3 MN	SIR	300	1,5 - 3	1750	50 / 55	60 / 65	70 / 77	58	288	320	336	256	210	210	Ø220	608	440	270	125	605
EAC 3 MAR	RAD	300	3	3500	45	190	92	50	237	320	288	219	150	150	Ø220	557	440	270	125	545
EAC 3 TN-1,5	SIR	300	1,5	1750	50	60	75	55	288	310	336	256	210	210	Ø220	598	440	250	125	585
EAC 3 TN	SIR	300	3	1750	55	65	77	58	288	320	336	256	210	210	Ø220	608	440	270	125	605
EAC 3 TAR	RAD	300	3	3500	45	190	92	50	237	320	288	219	150	150	Ø220	557	440	270	125	545
EAC 4 MN	SIR	330	2	1750	58	83	85	65	343	350	331	270	230	230	Ø260	693	500	270	80	580
EAC 4 TN-2	SIR	330	2	1750	58	83	85	60	343	350	331	270	230	230	Ø260	693	500	270	80	580
EAC 4 TN	SIR	330	4	1750	60	86	86	63	343	360	331	270	230	230	Ø260	703	500	270	80	580
EAC 4 TAR	RAD	330	5	3500	68	250	101	60	255	360	356	275	160	140	Ø260	615	500	270	80	490
EAC 5 MN	SIR	360	3	1750	70	90	92	77	338	350	385	280	250	250	Ø260	688	500	270	80	600
EAC 5 TN-3	SIR	360	3	1750	70	90	92	70	338	350	385	280	250	250	Ø260	688	500	270	80	600
EAC 5 TN	SIR	360	5	1750	75	95	94	74	338	360	385	280	250	250	Ø260	698	500	270	80	600
EAC 5 TAR	RAD	360	7,5	3500	98	300	102	70	272	372	385	280	180	160	Ø260	644	500	340	80	580